

Features

- Superior conducted attenuation performance
- Compact design, lower cost
- With IEC320 AC socket
- Current rating 20A
- Practical solution for medical devices

Marketing Applications

- Measuring instruments
- Endoscopy light source
- Medical scale
- Medical device (not body-coupled)
- Portable electrical equipment

Numbering System

1 SS1 **2** - F **3** **4** **5** - **6**

1 Rated current
20

2 Electrical schematic
L: medical compliance

3 Components value (refer Filter selection table)
CE: $C_x=0.22\mu F$


4 Grounded choke (optional)
G: $L_g=100\mu H$

5 Bleeder resistor (optional)
R: $R=1M\ \text{ohm}; 1/4W\ \text{min.}$

6 Output connections (refer Output terminal)
Q: fast-on tab (6.3mm)
W: with wired (100mm)

Electrical Schematic •


• L: medical compliance

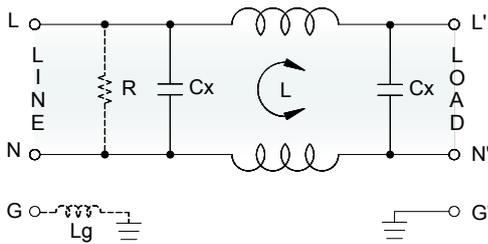

Filter Attenuation

Insertion loss (dB) in 50 ohm system CISPR 17 (for reference only)

■ 20A



Common mode / Asymmetric (L-G) ————
Differential mode / Symmetric (L-L) - - - - -


Filter Selection Table •

Filter Part No.	Rated Current @50°C [A]	Leakage Current @250VAC/50Hz [μA]	Inductance @10KHz,0.25V [mH]	Capacitance		Output terminal	
				Cx [μF]	Cy [nF]		
L: medical compliance							
20SS1L-FCE..	20	5	0.6	0.22	-	-Q	-W


Output Terminal

(unit: mm)

- **Q:** fast-on tab based on UL310 standard



- **W:** with wired stripped and tinned



Mechanical Drawing (unit: mm) •

- **F**

